

**FLOWMOTION** Living





# FLOWMOTION Living

				
	25 x 70 cm	25 x 70 cm	25 x 70 cm	25 x 70 cm
Article number	<b>1370</b>	<b>1370</b>	<b>1370</b>	<b>1370</b>
Product group	GR00 	GR10 	GR60 	GR61 
Dimensions (mm)	Basic tile 247 x 697 x 9 mm	Basic tile 247 x 697 x 9 mm	Basic tile 247 x 697 x 9 mm	Basic tile 247 x 697 x 9 mm
Colour	white	beige	greige	grey
Finish	matt <b>ceramicplus</b>	matt <b>ceramicplus</b>	matt <b>ceramicplus</b>	matt <b>ceramicplus</b>
Material	Nonvitreous	Nonvitreous	Nonvitreous	Nonvitreous
Unit of measure	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce
Per box	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce
Per pallet	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box
Min. sales unit	P (box)	P (box)	P (box)	P (box)
Calculation unit	m <sup>2</sup>	m <sup>2</sup>	m <sup>2</sup>	m <sup>2</sup>
Price group	<b>P101</b> ■ Nature Side 2146 CW60, Upper Side 2115 C11	<b>P101</b> ■ Nature Side 2146 CW60	<b>P101</b> ■ Nature Side 2146 CW60	<b>P101</b> ■ Nature Side 2148 CW60
				
	25 x 70 cm	25 x 70 cm	25 x 70 cm	25 x 70 cm
Article number	<b>1371</b>	<b>1371</b>	<b>1371</b>	<b>1371</b>
Product group	GR05 	GR15 	GR65 	GR66 
Dimensions (mm)	Decor 247 x 697 x 9 mm	Decor 247 x 697 x 9 mm	Decor 247 x 697 x 9 mm	Decor 247 x 697 x 9 mm
Colour	white	beige	greige	grey
Finish	matt   relief <b>ceramicplus</b>	matt   relief <b>ceramicplus</b>	matt   relief <b>ceramicplus</b>	matt   relief <b>ceramicplus</b>
Material	Nonvitreous	Nonvitreous	Nonvitreous	Nonvitreous
Unit of measure	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce	m <sup>2</sup>   16,57 kg   5,71 pce
Per box	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce	0,88 m <sup>2</sup>   14,50 kg   5 pce
Per pallet	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box	57,75 m <sup>2</sup>   957 kg   66 box
Min. sales unit	P (box)	P (box)	P (box)	P (box)
Calculation unit	m <sup>2</sup>	m <sup>2</sup>	m <sup>2</sup>	m <sup>2</sup>
Price group	<b>P124</b>	<b>P124</b>	<b>P124</b>	<b>P124</b>

# FLOWMOTION Living



5 x 70 cm



5 x 70 cm



5 x 70 cm



5 x 70 cm

Article number	<b>1328</b>	<b>1328</b>	<b>1328</b>	<b>1328</b>
	GR07	GR17	GR67	GR68
Product group	Border	Border	Border	Border
Dimensions (mm)	47 x 697 x 9 mm	47 x 697 x 9 mm	47 x 697 x 9 mm	47 x 697 x 9 mm
Colour	white	beige	greige	grey
Finish	metallic   relief	metallic   relief	metallic   relief	metallic   relief
Material	Nonvitreous	Nonvitreous	Nonvitreous	Nonvitreous
Unit of measure	m   0,83 kg   1,43 pce	m   0,83 kg   1,43 pce	m   0,83 kg   1,43 pce	m   0,83 kg   1,43 pce
Per box	16,78 m   13,92 kg   24 pce	16,78 m   13,92 kg   24 pce	16,78 m   13,92 kg   24 pce	16,78 m   13,92 kg   24 pce
Per pallet	-	-	-	-
Min. sales unit	E (pce)	E (pce)	E (pce)	E (pce)
Calculation unit	Piece	Piece	Piece	Piece
Price group	<b>E36</b>	<b>E36</b>	<b>E36</b>	<b>E36</b>

# TECHNICAL INFORMATION

## EMAS validation



V & B Fliesen GmbH was the first German tile manufacturer to participate in the EMAS (Eco-Management and Audit Scheme), currently the strictest test system for environmental criteria, at Merzig, Mettlach and La Ferté-Gaucher. It calls for a continuous, performance-oriented and regularly measurable optimisation process in which employees must also be involved.

In 2013, Bureau Veritas recertified V & B Fliesen GmbH for another three years.

## Certifications



### DIN EN ISO 9001

The DIN EN ISO 9001 quality management system has been documenting the ongoing optimisation of work processes throughout the company since 1995.

### DIN EN ISO 14001

Based on the plan-do-check-act cycle and ongoing improvement in environmental performance, DIN EN ISO 14001 specifies the main requirements for identification, monitoring and supervision of direct and indirect environmental aspects in the company.

### DIN EN ISO 50001

V & B Fliesen GmbH is certified in compliance with standard ISO 50001 as a company with particularly energy-efficient production.

All certifications are carried out by Bureau Veritas.


# TECHNICAL INFORMATION



## ceramicplus

Villeroy & Boch


The **ceramicplus** finish is applied to our nonvitreous wall tiles at the factory. Our tiles thus require much less care. Often, the only cleaning materials that are required are water and a cloth; aggressive cleaning agents are redundant.

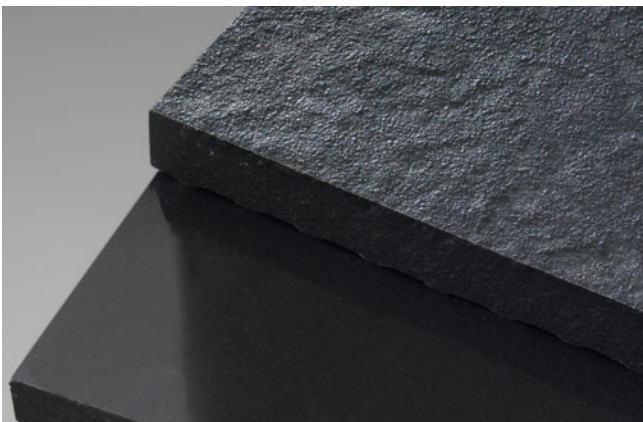

## vilbostone

Porcelain stoneware


vilbostone porcelain stoneware permits a wealth of different surface designs featuring unusual colour and sheen effects. vilbostone porcelain stoneware is available both glazed and unglazed, with a matt, polished, rough-polished or relief surface finish and in various classes of slip resistance.

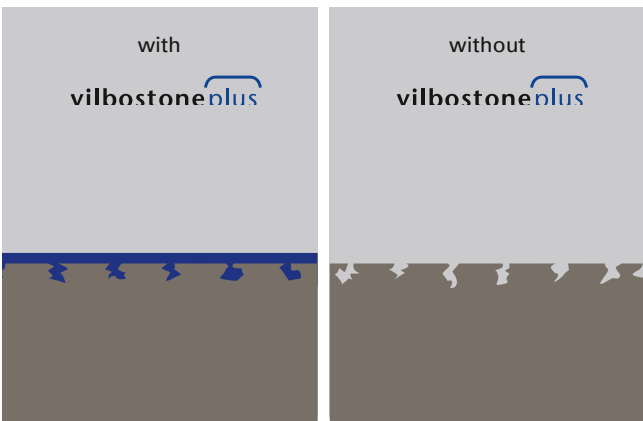


## vilbostoneplus

Unglazed vilbostone porcelain stoneware with a matt or rough-polished surface finish have the vilbostoneplus seal, which renders the tiles particularly resistant to dirt and stains. During the manufacturing process, the structure of the tile surface is sealed in order to further increase the tiles' resistance to staining and dirt, as a result of which subsequent treatment with impregnating agents is no longer necessary.

### Rectified Tiles



View from above



View from side

### Slip resistance















**R9:** 6° – 10°    **R10:** 10° – 19°    **R11:** 19° – 27°    **R12:** 27° – 35°    **R13:** > 35°


The slip resistance of tiles is tested on an inclined plane with a pre-determined angle of inclination and classified according to rating groups R9 to R13.

# SIGNS AND SYMBOLS


---

**2 3 4 5** Glazed vitreous floor (or wall) tile classified in the indicated wear-resistance group in acc. with DIN EN 10545-7. For heavily frequented application areas or those subjected to extreme surface wear - for example in the areas surrounding cash tills or entrance areas to passage ways - we recommend the use of unglazed porcelain stoneware, which has an unusually high degree of wear-resistance.

-  Anti-slip in workshop areas.
-  Anti-slip in barefoot areas.
-  Precious metal-plated.  
Not scratchproof. Clean with water or dish washing liquid only. Jointing with quartzpowderfree material only.
-  Glass-plated.  
Hairline cracks in the glaze may develop.
-  Handpainted.  
Hairline cracks in the glaze may develop.
-  One glazed edge.
-  One glazed long edge.
-  Two glazed edges.
-  frostproof in acc. with DIN EN 10545-12
-  Rectified
-  Sample tiles available for a charge
-  Produced to order only, not stocked as standard.  
Cancellation not possible.

 ceramicplus

 vibstoneplus  
surface seal

 1 2 3 4  
Shade variation

## Recommendations

---

 Floor tiles

# V & B Fliesen GmbH

Rotensteiner Weg  
D-66663 Merzig  
Germany

Our Partner:



**Showroom Location**  
**Tropical Tile & Marble**  
9950 Northwest 77<sup>th</sup> Avenue  
Miami, FL 33016

<b>Showroom Hours</b>	<b>Warehouse Hours</b>
M-F: 8am - 5pm	M-F: 7:30am - 5:00pm
Sat: 9am - 4pm	Sat: 8am - 4pm

**Contact Information**  
Phone: 305-823-2360  
Fax: 305-824-9063  
info@tropicaltile.com  
www.tropicaltile.com

03/15 Shades and dimensions subject to the usual tolerances. We reserve the right to make technical modifications to the range and alter colours.

